



seLO[®]
PATENT
[PENDING]

Tempus[®]

TEMPORARY FIRE DOORS

FIRE PROTECTION FOR MULTIPLE PROJECTS

- ✓ E60 FIRE RATED
- ✓ ASSURED COMPLIANCE
- ✓ UNLATCHED
- ✓ DURABLE STEEL
- ✓ MAINTENANCE FREE
- ✓ REUSABLE



seLO[®]

YOUR *sustainable* SOLUTION

Tempus TEMPORARY FIRE DOORS


NEXT GENERATION FIRE PROTECTION



Scan to view website

Constructed from heavy-duty steel, Tempus is designed to withstand the rigours of a construction site whilst maintaining fire compliance throughout.

Available in two leaf sizes; 1055mm(w) x 2100mm(h) and 1055mm(w) x 2300mm(h).

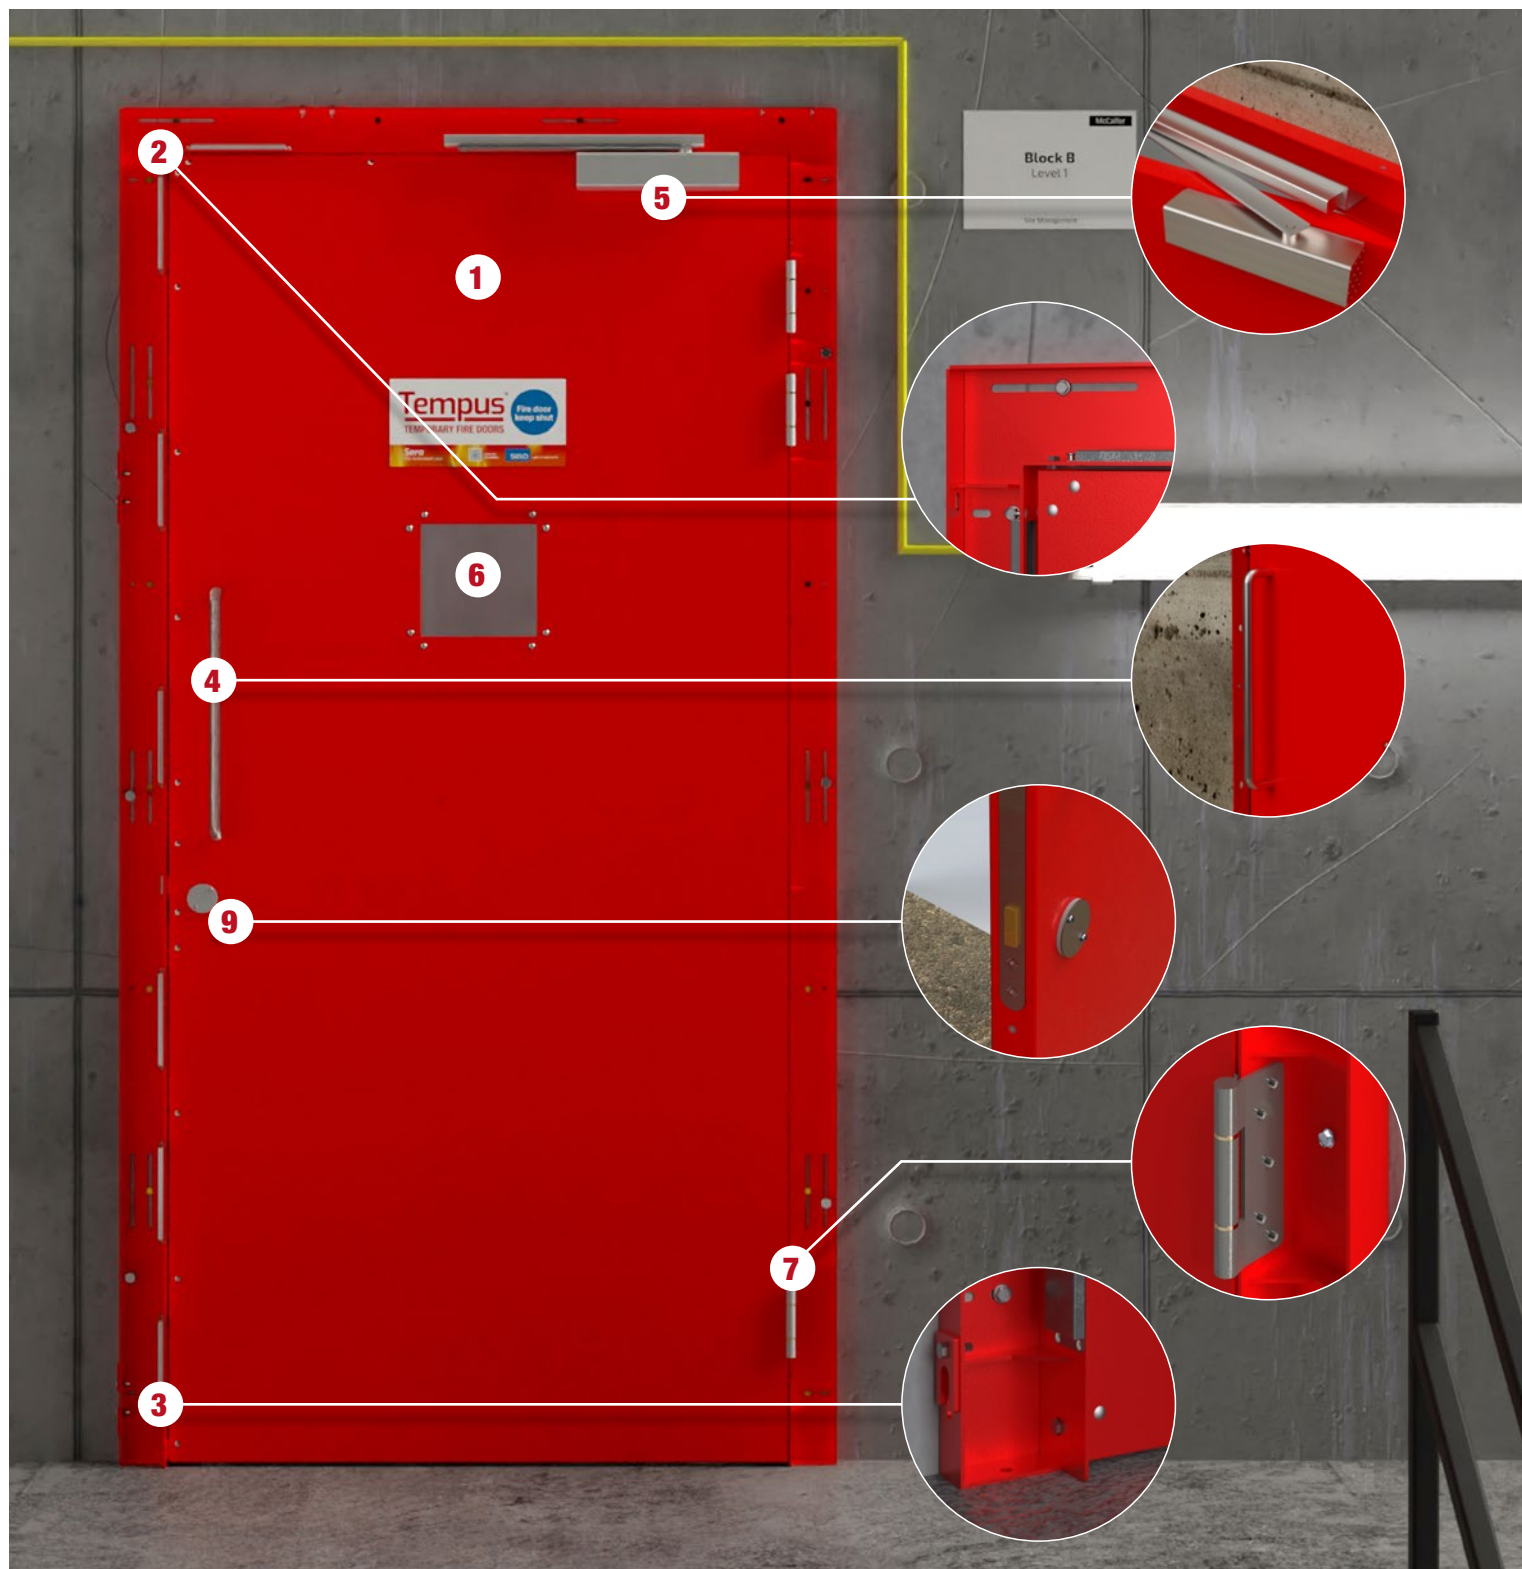

STANDARD DETAILS

1 60 MINUTE FIRE RATING

Tested to BS EN1634-1 for resistance to fire.

2 FIXING HOLES (FACE-FITTED)

Easy access and quick to install.

Provided with slots to enable the door to be lifted if required without removing all the fixings.

3 TRAVEL-BOLT SYSTEM

Keeps door closed for easy transportation.

Holds the exact door gap when installing.

4 PULL-HANDLE

No latch required allowing simple and efficient usage by site operatives.

5 DOOR CLOSER, BACK-CHECK AND DELAYED ACTION

Ensures the door is always closed after use.

Back check provided to prevent damage to the doorset and the surrounding area when it is opened too fast.

Delayed action holds the door open for a few seconds before closing.

6 VISION PANEL

Provides visibility of anyone coming the other side avoiding any accidents or collisions.

7 DURABLE, MAINTENCE-FREE HINGES

With self lubricating sintered bronze bearings.


8 PUSH/KICK PLATE (PUSH-SIDE ONLY)

Providing additional door protection from the wear-and-tear of daily use.

9 DEADLOCK

Providing additional door security by allowing areas within the building to be closed off (cylinder not included).

OPTIONAL EXTRA

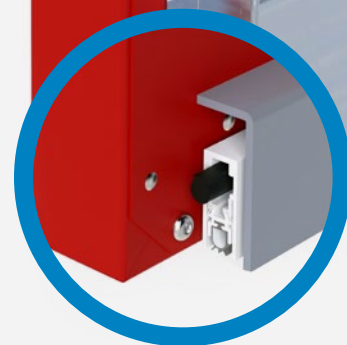

DROP-DOWN THRESHOLD SEAL

Automatic drop-down threshold to provide a complete seal underneath the door.

SPECIAL FEATURE

Sera™

Fire-activated Lock

In the event of a fire the door locks to stop the spread of fire

The unique inert locking system automatically activates when in direct contact with fire, typically between 100-200°C.

Once activated, forced entry is possible for Fire Brigade.

SELO®
PATENT
PENDING

SUSTAINABILITY

As one door closes, another opens!

Tempus is a self-contained, pre-hung unit meaning the doorset **can be reused time and time again on multiple projects**. By reusing the doorset we can significantly reduce the waste associated with traditional temporary doors.



INSTALLATION

The pre-hung unit makes **installation quick and simple**. The doorset is face-fitted to the wall, this ensures the doorset can accommodate varying opening sizes. If required, our technical team can assist with any installation queries on-site.



Scan to download **installation guide**



SUPPORT

No one cares like Selo does about the success of every project, that's why we're the only doorset manufacturer to offer **Halo Assist™** providing you with **dedicated project support** assisting you from initial concept and specification, through to the final execution.



Contact us for **support**

Our mission is to **simplify bespoke** and **complex building methods™**

Contact our experienced project consultants:
call 020 3880 0339 **email** sales@selo-uk.com



call 020 3880 0339
email sales@selo-uk.com
www.selo.global

Selo
K2 Kents Hill Business Park Timbold Drive
Milton Keynes MK7 6BZ



Follow us on:

